










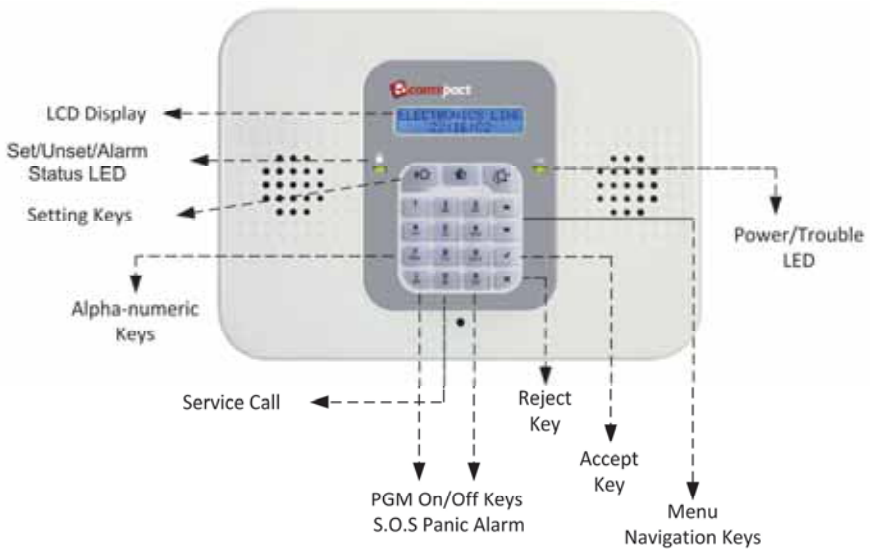








compact

Quick User Guide




UPGRADING
EVERYDAY
SECURITY

Thank you for choosing **CommPact** wireless intruder control panel. This quick start guide describes the main user operating actions of the **CommPact**. To download the full version of the CommPact User Manual go to www.riscogroup.co.uk, enter the Downloads menu and select Electronics Line Manuals.

Full Set	Press 	
Partial Set	Press 	If required, enter your user code
Perimeter Set	Press 	
Unset	Enter your user code	In addition, silences the siren in alarm event
Panic alarm	Press and hold down  + 	
Fire alarm	Press and hold down  + 	
Medical alarm	Press and hold down  + 	
Check system troubles	Press  and scroll the list	Additionally, silences any trouble tones
Global Chime	Press  	
Access Menu Mode	Press  then [User Code]	
Service Call	Press  and then hold 	
Turn On / Off PGM	 /  → 30	

LEDs

Indication

In case of System Trouble, press  to identify the problem.







LED:
Off: System unset
Green : System set
Flashing red : Alarm





'OK' LED:

Green: Power OK
Yellow: System trouble
Flashing green: Open zone
Flashing yellow: (Slow) Low battery,
 (Fast) AC loss.

Edit/Delete User Code

1. From the main display press .
2. Enter master code (Default code 1234).
3. Select [4] User Code and press .
4. Select a user and press .
5. Select [1] Edit Code.
6. Edit the user code or enter 0000 to delete.
7. Press .

Omit a Zone

1. From the main display press .
2. Enter master code (Default code 1234).
3. On the main menu, press [21].
4. Select a zone and press  to toggle.
5. To save the status, press  .

SMS Control Commands

Controlling the System through SMS

SMS Structure:

[Free text - Up to 43 characters][#][User Code][Command]

Example:

UNSET#1234120

Optional Free Text					User Code				Command			
U	N	S	E	T	#	1	2	3	4	1	2	0

Command Code Numbers:

- 120: Unset
- 121: Full set
- 122: Part set
- 123: Perimeter set
- 030: PGM off
- 130: PGM on
- 200: System set status

Telephone Control Commands

1. Dial the number of the premises
 - o If your system is connected to a regular phone line dial the number of the panel and wait for three rings then hang up. Wait at least five seconds and dial the number again. On the second ring the control system answers and sounds two tones.
 - o If your system supports cellular communication dial and wait until the system answers and two tones are heard.
2. Within 15 seconds, enter the Telecontrol Code (code 29). After a tone sounds, press:
 - 3: Full set
 - 2: 2 Way Audio
 - 6: Unset
 - 430: PGM on
 - 7: Extend the call
 - 530: PGM off
 - 9: Cancel sounder
 - *#: Disconnect the line

Keyfob



: Full Set



: Part Set, PGM



: Unset



: Perimeter Set, PGM

Register to MyELAS

1. Go to www.MyELAS.com/register.
2. Fill in your first name and last name.
3. Enter your email address as Login Name (required for 1st time activation and can be altered later)
4. Define password (minimum of 6 characters and at least one digit) and confirm.
5. Enter in the 15 digit Panel ID as it appears on the sticker located on the side of the panel.
6. Complete registration form and press the Register Button.
7. To complete registration open the email message received on the email account you defined as Login Name.

Login to MyELAS

1. Go to www.MyELAS.com.
2. Enter User Name and Password that you supplied during the registration process.
3. Enter Passcode (CommPact User Code).
4. Click the Enter button.

You can also login to MyELAS using your Smartphone: Download MyELAS app from the Apple App store or the from Google play store for android devices.